



UK Certification Authority for Reinforcing Steels

Pembroke House, 21 Pembroke Road
Sevenoaks, Kent, TN13 1XR
Tel: 00 44 1732 450000
Fax: 00 44 1732 455917
Email :
bahadirkaradayi@ukcares.com
Website: www.ukcares.com

Ref.:CC9718BK

24 December 2019

Mr. Hussam Bastug
Quality Assurance Manager
Diler Demir Celik Endustri ve Ticaret A.S.

Dear Mr. Bastug,

CARES Sustainability scheme – Verified EPD report to EN 15804:2012+A1:2013

UK CARES has been providing Sustainability certification since 2007. This has provided a means by which the environmental impact of Constructional Steels can be objectively measured. I am pleased to inform you that BRE Global has independently verified our Environmental Product Declaration (EPD) service in accordance with the European Standard, EN 15804 – “Sustainability of construction works — Environmental product declarations — Core rules for the product category of construction products.”

A generic EPD for Carbon Steel Reinforcing Bar (Scrap based electric arc furnace route) and company specific EPDs for different types of Constructional Steels (Scrap and DRI Route) are published on:

- Greenbook Live (<http://www.greenbooklive.com/search/scheme.jsp?id=300>) and
- Eco Platform (<https://www.eco-platform.org/list-of-all-eco-epd.html>)

EPDs listed in Greenbooklive and Eco Platform cover the whole life cycle assessment of environmental impact of Constructional Steels from raw materials through manufacturing to use, disposal, reuse, recovery and recycling (Cradle-to-gate with all options EPD).

Eco Platform’s EPD registration mark enables recognition of the CARES EPDs in Europe and other international markets. This enables CARES Sustainability approved firms to provide the necessary evidence to achieve the maximum number of credits in green building rating systems such as BREEAM New Construction 2014 [MAT 03 – Responsible sourcing of materials] as well as similar credits in LEED and Estidama.

Please do not hesitate to contact me should you require any further information.

Yours sincerely,

C. Bahadir KARADAYI
Scheme Manager - Sustainability

Statement of Verification

BREG EN EPD No.: 000129

Issue 02

ECO EPD Ref. No. 000423

This is to verify that the

Environmental Product Declaration

provided by:

Diler Demir Celik Endustri ve Ticaret A.S. (member of UK CARES)

is in accordance with the requirements of:

EN 15804:2012+A1:2013

and

BRE Global Scheme Document SD207

This declaration is for:

Carbon Steel Reinforcing Bar (Secondary production route – Scrap)



Company Address

Dilovasi Organize Sanayi Bolgesi
1 Kisim Dicle Cd. No:30
Dilovasi Kocaeli
41455
Turkey



Laura Critien
Operator

23 December 2019
Date of this Issue

23 December 2019
Date of First Issue

22 December 2022
Expiry Date



This Statement of Verification is issued subject to terms and conditions (for details visit www.greenbooklive.com/terms.)

To check the validity of this statement of verification please, visit www.greenbooklive.com/check or contact us.

BRE Global Ltd., Garston, Watford WD25 9XX.
T: +44 (0)333 321 8811 F: +44 (0)1923 664603 E: Enquiries@breglobal.com



Environmental Product Declaration

EPD Number: 000129

General Information

EPD Programme Operator	Applicable Product Category Rules
BRE Global Watford, Herts WD25 9XX United Kingdom	BRE Environmental Profiles 2013 Product Category Rules for Type III environmental product declaration of construction products to EN 15804:2012+A1:2013
Commissioner of LCA study	LCA consultant/Tool
UK CARES Pembroke House 21 Pembroke Road Sevenoaks Kent, TN13 1XR UK	UK CARES EPD Tool thinkstep UK Ltd Euston Tower - Level 33, 286 Euston Road London, NW1 3DP www.thinkstep.com
Declared/Functional Unit	Applicability/Coverage
1 tonne of carbon steel reinforcing bars manufactured by the secondary (scrap-based) production route as used within concrete structures for a commercial building.	Manufacturer-specific product
EPD Type	Background database
Cradle to Gate with options	GaBi
Demonstration of Verification	
CEN standard EN 15804 serves as the core PCR ^a	
Independent verification of the declaration and data according to EN ISO 14025:2010 <input type="checkbox"/> Internal <input checked="" type="checkbox"/> External	
(Where appropriate ^b) Third party verifier: Jane Anderson	
a: Product category rules b: Optional for business-to-business communication; mandatory for business-to-consumer communication (see EN ISO 14025:2010, 9.4)	
Comparability	
Environmental product declarations from different programmes may not be comparable if not compliant with EN 15804:2012+A1:2013. Comparability is further dependent on the specific product category rules, system boundaries and allocations, and background data sources. See Clause 5.3 of EN 15804:2012+A1:2013 for further guidance	

Information modules covered

Product			Construction		Use stage							End-of-life				Benefits and loads beyond the system boundary
					Related to the building fabric					Related to the building						
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Raw materials supply	Transport	Manufacturing	Transport to site	Construction – Installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstruction demolition	Transport	Waste processing	Disposal	Reuse, Recovery and/or Recycling potential
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

Note: Ticks indicate the Information Modules declared.

Manufacturing site(s)

Diler Demir Celik Endustri ve Ticaret A.S. (member of UK CARES)

Dilovasi Organize Sanayi Bolgesi
1. Kisim, Dicle Cd. No: 30
Dilovasi, Kocaeli
41455
Turkey

Construction Product:

Product Description

Reinforcing steel bar (according to product standards listed in Sources of Additional Information) that is obtained from scrap, melted in an Electric Arc Furnace (EAF) followed by hot rolling.

The declared unit is 1 tonne of carbon steel reinforcing bars as used within concrete structures for a commercial building.

Technical Information

Property	Value, Unit
Production route	EAF
Density	7850 kg/m ³
Modulus of elasticity	200000 N/mm ²
Weldability (Ceq)	max 0.50 %
Yield strength (as per BS 4449:2005)	min 500 N/mm ²
Tensile strength (as per BS 4449:2005)	min 540 N/mm ² (Tensile strength/Yield Strength \geq 1.08)
Surface geometry (Relative rib area, f_R as per BS 4449:2005)	min 0.040 for Bar Size >6mm & \leq 12mm min 0.056 for Bar Size >12
Agt (% total elongation at maximum force as per BS 4449:2005)	min 5 %
Re-bend test (as per BS 4449:2005)	Pass
Fatigue test (as per BS 4449:2005)	Pass
Recycled content (as per ISO 14021:2016)	97.2 %

Main Product Contents

Material/Chemical Input	%
Fe	97
C, Mn, Si, V, Ni, Cu, Cr, Mo and others	3

Manufacturing Process

Scrap metal is melted in an electric arc furnace to obtain liquid steel. This is then refined to remove impurities and alloying additions can be added to give the required properties.

Hot metal (molten steel) from the EAF is then cast into steel billets before being sent to the rolling mill where they are rolled and shaped to the required dimensions for the finished bars and coils of reinforcing steel.

Process flow diagram



Construction Installation

Processing and proper use of reinforcing steel products depends on the application and should be made in accordance with generally accepted practices, standards and manufacturing recommendations.

During transport and storage of reinforcing steel products the usual requirements for securing loads is to be observed.

Use Information

The composition of the reinforcing steel products does not change during use.

Reinforcing steel products do not cause adverse health effects under normal conditions of use.

No risks to the environment and living organisms are known to result from the mechanical destruction of the reinforcing steel bar product itself.

End of Life

Reinforcing steel products are not reused at end of life but can be recycled to the same (or higher/lower) quality of steel depending upon the metallurgy and processing of the recycling route.

It is a high value resource, so efforts are made to recycle steel scrap rather than disposing of it at EoL. A recycling rate of 92% is typical for reinforcing steel bar products.

Life Cycle Assessment Calculation Rules

Declared unit description

The declared unit is 1 tonne of carbon steel reinforcing bars manufactured by the secondary (scrap-based) production route as used within concrete structures for a commercial building (i.e. 1 tonne in use, accounting for losses during fabrication and installation, not 1 tonne as produced).

System boundary

The system boundary of the EPD follows the modular design defined by EN 15804. This is a cradle to gate – with all options EPD and thus covers all modules from A1 to C4 and includes module D as well.

Impacts and aspects related to losses/wastage (i.e. production, transport and waste processing and end-of-life stage of lost waste products and materials) are considered in the modules in which the losses/wastage occur.

Once steel scrap has been collected for recycling it is considered to have reached the end of waste state.

Data sources, quality and allocation

Data Sources: Manufacturing data of the period 01/01/2018-31/12/2018 has been provided by Diler Demir Celik Endustri ve Ticaret A.S. (member of UK CARES).

Data Quality: Data quality can be described as good. Background data are consistently sourced from thinkstep databases. The primary data collection was thorough, considering all relevant flows and these data have been verified by UK CARES.

Allocation: EAF slag and mill scale are produced as co-products from the steel manufacturing process. Impacts are allocated between the steel, the slag and the mill scale based on economic value.

Production losses of steel during the production process are recycled in a closed loop offsetting the requirement for external scrap. Specific information on allocation within the background data is given in the GaBi datasets documentation (/GaBi 8 2019/).

Cut-off criteria

On the input side all flows entering the system and comprising more than 1% in total mass or contributing more than 1% to primary energy consumption are considered. All inputs used as well as all process-specific waste and process emissions were assessed. For this reason, material streams which were below 1% (by mass) were captured as well. In this manner the cut-off criteria according to the BRE guidelines are fulfilled.

LCA Results

(MND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

Parameters describing environmental impacts			GWP	ODP	AP	EP	POCP	ADPE	ADPF
			kg CO ₂ equiv.	kg CFC 11 equiv.	kg SO ₂ equiv.	kg (PO ₄) ³⁻ equiv.	kg C ₂ H ₄ equiv.	kg Sb equiv.	MJ, net calorific value.
Product stage	Raw material supply	A1	AGG	AGG	AGG	AGG	AGG	AGG	AGG
	Transport	A2	AGG	AGG	AGG	AGG	AGG	AGG	AGG
	Manufacturing	A3	AGG	AGG	AGG	AGG	AGG	AGG	AGG
	Total (of product stage)	A1-3	876	1.14E-06	2.57	0.365	0.226	1.35E-04	1.02E+04
Construction process stage	Transport	A4	16.5	2.73E-15	0.036	0.009	-0.012	1.27E-06	224
	Construction	A5	98.6	1.13E-07	0.274	0.041	0.018	1.48E-05	1180
Use stage	Use	B1	0	0	0	0	0	0	0
	Maintenance	B2	0	0	0	0	0	0	0
	Repair	B3	0	0	0	0	0	0	0
	Replacement	B4	0	0	0	0	0	0	0
	Refurbishment	B5	0	0	0	0	0	0	0
	Operational energy use	B6	0	0	0	0	0	0	0
	Operational water use	B7	0	0	0	0	0	0	0
End of life	Deconstruction, demolition	C1	2.05	2.89E-16	0.003	4.22E-04	3.27E-04	5.71E-08	28.3
	Transport	C2	39.6	6.44E-15	0.127	0.032	-0.033	2.94E-06	536
	Waste processing	C3	0	0	0	0	0	0	0
	Disposal	C4	1.19	6.92E-15	0.007	8.09E-04	5.57E-04	4.38E-07	16.7
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	330	-2.07E-12	0.775	0.069	0.101	-2.04E-05	2.62E+03

GWP = Global Warming Potential;
 ODP = Ozone Depletion Potential;
 AP = Acidification Potential for Soil and Water;
 EP = Eutrophication Potential;

POCP = Formation potential of tropospheric Ozone;
 ADPE = Abiotic Depletion Potential – Elements;
 ADPF = Abiotic Depletion Potential – Fossil Fuels;

LCA Results (continued)

Parameters describing resource use, primary energy			PERE	PERM	PERT	PENRE	PENRM	PENRT
			MJ	MJ	MJ	MJ	MJ	MJ
Product stage	Raw material supply	A1	AGG	AGG	AGG	AGG	AGG	AGG
	Transport	A2	AGG	AGG	AGG	AGG	AGG	AGG
	Manufacturing	A3	AGG	AGG	AGG	AGG	AGG	AGG
	Total (of product stage)	A1-3	1.25E+03	0	1.25E+03	1.04E+04	0	1.04E+04
Construction process stage	Transport	A4	13.0	0	13.0	225	0	225
	Construction	A5	162	0	162	1.20E+03	0	1.20E+03
Use stage	Use	B1	0	0	0	0	0	0
	Maintenance	B2	0	0	0	0	0	0
	Repair	B3	0	0	0	0	0	0
	Replacement	B4	0	0	0	0	0	0
	Refurbishment	B5	0	0	0	0	0	0
	Operational energy use	B6	0	0	0	0	0	0
	Operational water use	B7	0	0	0	0	0	0
End of life	Deconstruction, demolition	C1	8.73E-02	0	8.73E-02	28.4	0	28.4
	Transport	C2	29.6	0	29.6	537	0	537
	Waste processing	C3	0	0	0	0	0	0
	Disposal	C4	2.18	0	2.18	17.2	0	17.2
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	-274	0	-274	2.49E+03	0	2.49E+03

PERE = Use of renewable primary energy excluding renewable primary energy used as raw materials;
 PERM = Use of renewable primary energy resources used as raw materials;
 PERT = Total use of renewable primary energy resources;

PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials;
 PENRM = Use of non-renewable primary energy resources used as raw materials;
 PENRT = Total use of non-renewable primary energy resource

LCA Results (continued)

Parameters describing resource use, secondary materials and fuels, use of water						
			SM	RSF	NRSF	FW
			kg	MJ net calorific value	MJ net calorific value	m ³
Product stage	Raw material supply	A1	AGG	AGG	AGG	AGG
	Transport	A2	AGG	AGG	AGG	AGG
	Manufacturing	A3	AGG	AGG	AGG	AGG
	Total (of product stage)	A1-3	1.09E+03	-0.006	-0.121	3.13
Construction process stage	Transport	A4	0	0	0	0.022
	Construction	A5	109	-5.95E-04	-0.012	0.356
Use stage	Use	B1	0	0	0	0
	Maintenance	B2	0	0	0	0
	Repair	B3	0	0	0	0
	Replacement	B4	0	0	0	0
	Refurbishment	B5	0	0	0	0
	Operational energy use	B6	0	0	0	0
	Operational water use	B7	0	0	0	0
End of life	Deconstruction, demolition	C1	0	0	0	2.02E-04
	Transport	C2	0	0	0	0.05
	Waste processing	C3	0	0	0	0
	Disposal	C4	0	0	0	0.004
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	0	0	0	0.259

SM = Use of secondary material;
RSF = Use of renewable secondary fuels;

NRSF = Use of non-renewable secondary fuels;
FW = Net use of fresh water

LCA Results (continued)

Other environmental information describing waste categories			HWD	NHWD	RWD
			kg	kg	kg
Product stage	Raw material supply	A1	AGG	AGG	AGG
	Transport	A2	AGG	AGG	AGG
	Manufacturing	A3	AGG	AGG	AGG
	Total (of product stage)	A1-3	0.072	224	0.067
Construction process stage	Transport	A4	1.26E-05	0.018	3.05E-04
	Construction	A5	0.007	32.1	0.007
Use stage	Use	B1	0	0	0
	Maintenance	B2	0	0	0
	Repair	B3	0	0	0
	Replacement	B4	0	0	0
	Refurbishment	B5	0	0	0
	Operational energy use	B6	0	0	0
	Operational water use	B7	0	0	0
End of life	Deconstruction, demolition	C1	3.40E-09	0.003	3.34E-05
	Transport	C2	2.84E-05	0.042	7.23E-04
	Waste processing	C3	0	0	0
	Disposal	C4	2.94E-07	80.1	2.31E-04
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	1.65E-06	5.19	-0.053

HWD = Hazardous waste disposed;
 NHWD = Non-hazardous waste disposed;
 RWD = Radioactive waste disposed

LCA Results (continued)

Other environmental information describing output flows – at end of life						
			CRU	MFR	MER	EE
			kg	kg	kg	MJ per energy carrier
Product stage	Raw material supply	A1	AGG	AGG	AGG	AGG
	Transport	A2	AGG	AGG	AGG	AGG
	Manufacturing	A3	AGG	AGG	AGG	AGG
	Total (of product stage)	A1-3	0	0	0	0
Construction process stage	Transport	A4	0	0	0	0
	Construction	A5	0	121	0	0
Use stage	Use	B1	0	0	0	0
	Maintenance	B2	0	0	0	0
	Repair	B3	0	0	0	0
	Replacement	B4	0	0	0	0
	Refurbishment	B5	0	0	0	0
	Operational energy use	B6	0	0	0	0
	Operational water use	B7	0	0	0	0
End of life	Deconstruction, demolition	C1	0	0	0	0
	Transport	C2	0	0	0	0
	Waste processing	C3	0	920	0	0
	Disposal	C4	0	0	0	0
Potential benefits and loads beyond the system boundaries	Reuse, recovery, recycling potential	D	0	0	0	0

CRU = Components for reuse;
MFR = Materials for recycling

MER = Materials for energy recovery;
EE = Exported Energy

Scenarios and additional technical information

Scenarios and additional technical information			
Scenario	Parameter	Units	Results
A4 – Transport to the building site	Transport to the fabricators and on to the construction site; including provision of all materials and products. Road transport distance for rolled steel to fabricators and road transport distance for steel construction forms to site are assumed to be 100 km and 250 km, respectively.		
	Truck trailer - Fuel	L/km	1.56
	Distance	km	350
	Capacity utilisation (including empty returns)	%	85
A5 – Installation in the building	Fabrication into reinforcing steel products and installation in the building; including provision of all materials, products and energy, as well as waste processing up to the end-of-waste state or disposal of final residues during the construction stage. Installation of the fabricated product into the building is assumed to result in 10% wastage (determined based on typical installation losses reported by the WRAP Net Waste Tool [WRAP 2017]). It is assumed that fabrication requires 15.34 kWh/tonne finished product, and that there is a 2% wastage associated with this process.		
	Ancillary materials for installation - Waste material from fabrication, losses per tonne of construction steel forms	%	2
	Energy Use - Energy per tonne required to fabricate construction steel forms	kWh	15.34
	Waste materials from installation wastage	%	10
B1 - Use	No impacts occur during use.		
B2 – Maintenance	No maintenance required		
B3 – Repair	No repair process required		
B4 – Replacement	No replacement considerations required		
B5 – Refurbishment	No refurbishment process required		
Reference service life	Reinforcing steel products are used in the main building structure so the reference service life will equal the lifetime of the building. The Concrete Society follows the definitions provided in BS EN 1990, which specifies “building structures and other common structures” as having a lifetime of 50 years (The Concrete Society, n.d.; BSI, 2005). On this basis, the RSL for this EPD is assumed to be 50 years.		
	Reference service life	Years	50
B6 – Use of energy; B7 – Use of water	No water or energy required during use stage related to the operation of the building		
C1 to C4 End of life,	The end-of-life stage starts when the construction product is replaced, dismantled or deconstructed from the building or construction works and does not provide any further function. This stage comprises: de-construction, demolition; transport to waste processing; waste processing for reuse, recovery and/or recycling; disposal		
	Waste for recycling - Recovered steel from crushed concrete	%	92


Scenarios and additional technical information

Scenario	Parameter	Units	Results
	Waste for energy recovery - Energy recovery is not considered for this study as most end of life steel scrap is recycled, while the remainder is landfilled	-	-
	Waste for final disposal - Unrecoverable steel lost in crushed concrete and sent to landfill	%	8
	Portion of energy assigned to rebar from energy required to demolish building, per tonne	MJ	24
	Transport to waste processing by Truck - Fuel consumption	L/km	1.56
	Transport to waste processing by Truck – Distance	km	463
	Transport to waste processing by Truck – Capacity utilisation	%	85
	Transport to waste processing by Truck – Density of Product	kg/m ³	7850
	Transport to waste processing by Container ship - Fuel consumption	L/km	0.00401
	Transport to waste processing by Container ship - Distance	km	158
	Transport to waste processing by Container ship – Capacity utilisation	%	50
	Transport to waste processing by Container ship – Density of Product	kg/m ³	7850
Module D	<p>It is assumed that 92% of the steel used in the structure is recovered for recycling, while the remainder is landfilled.</p> <p>“Benefits and loads beyond the system boundary” (module D) accounts for the environmental benefits and loads resulting from net steel scrap that is used as raw material in the EAF and that is collected for recycling at end of life.</p> <p>The resulting scrap credit/burden is calculated based on the global “value of scrap” approach (/worldsteel 2011).</p>		

Summary, comments and additional information

Interpretation

Scrap-based carbon steel rebar of Diler Demir Celik Endustri ve Ticaret A.S. is made via the EAF route. The bulk of the environmental impacts and primary energy demand is attributed to the manufacturing phase, covered by information modules A1-A3 of EN 15804. For GWP for instance, A1-A3 impacts account for 84.72% overall life cycle impacts for this category.

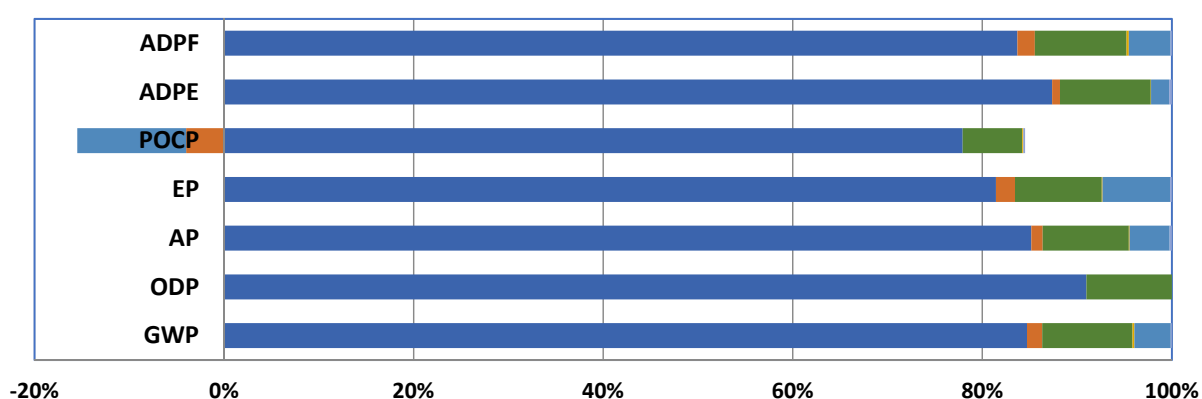

	GWP	ODP	AP	EP	POCP	ADPE	ADPF
■ A1-3	84.72%	90.98%	85.18%	81.45%	112.90%	87.38%	83.71%
■ A4	1.60%	0.00%	1.20%	2.01%	-5.79%	0.82%	1.84%
■ A5	9.54%	9.02%	9.08%	9.15%	9.09%	9.58%	9.68%
■ C1	0.20%	0.00%	0.10%	0.09%	0.16%	0.04%	0.23%
■ C2	3.83%	0.00%	4.21%	7.12%	-16.63%	1.90%	4.40%
■ C3	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%
■ C4	0.12%	0.00%	0.24%	0.18%	0.28%	0.28%	0.14%

References

BRE Global. BRE Environmental Profiles 2013: Product Category Rules for Type III environmental product declaration of construction products to EN 15804:2012+A1:2013. PN 514. Watford, BRE, 2014.

BSI. Sustainability of construction works – Environmental product declarations – Core rules for the product category of construction products. BS EN 15804:2012+A1:2013. London, BSI, 2013.

BSI. Environmental labels and declarations – Type III Environmental declarations – Principles and procedures. BS EN ISO 14025:2010 (identical to ISO 14025:2006). London, BSI, 2010.

BSI. Environmental management – Life cycle assessment – Principles and framework. BS EN ISO 14040:2006. London, BSI, 2006.

BSI. Environmental management – Life cycle assessment – requirements and guidelines. BS EN ISO 14044:2006+A1:2018. London, BSI, 2018.

Demolition Energy Analysis of Office Building Structural Systems, Athena Sustainable Materials Institute, 1997.

thinkstep AG; GaBi 8: Software-System and Database for Life Cycle Engineering. Copyright, TM. Stuttgart, Echterdingen, 1992-2019.

GaBi 8: Documentation of GaBi 8: Software-System and Database for Life Cycle Engineering. Copyright, TM. Stuttgart, Echterdingen, 1992-2019. <http://www.gabi-software.com/international/databases/gabi-databases/>

International Energy Agency, Energy Statistics 2018. <http://www.iea.org>

Kreißig, J. und J. Kümmel (1999): Baustoff-Ökobilanzen. Wirkungsabschätzung und Auswertung in der Steine-Erden-Industrie. Hrsg. Bundesverband Baustoffe Steine + Erden e.V.

SteelConstruction.Info 2012: SteelConstruction.info; The recycling and reuse survey, 2012 http://www.steelconstruction.info/The_recycling_and_reuse_survey

The Concrete Society: Design Working Life. Retrieved from The Concrete Society Web Site: <http://www.concrete.org.uk/fingertips-nuggets.asp?cmd=display&id=750>

U.S. Geological Survey, Mineral Commodity Summaries, Iron and Steel Slag, January 2014

Sustainability of construction works – Environmental product declarations – Methodology for selection and use of generic data; German version PD CEN/TR 15941:2010. London, BIS, 2010.

London Metal Exchange, Steel Rebar Prices, January 2019. <https://www.lme.com/en-gb/metals/ferrous/>

REGULATION (EU) No 305/2011 OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 9 March 2011 laying down harmonised conditions for the marketing of construction products and repealing Council Directive 89/106/EEC.

CARES SCS Sustainable Constructional Steel Scheme. Appendix 1 – Operational assessment schedule for the sustainable production of steel billets, steel bars/coils and wire rod for further processing into carbon steel bar, coil or rod for the reinforcement of concrete.

CARES SRC Steel for the Reinforcement of Concrete Scheme. Appendix 1 – Quality and operations assessment schedule for carbon steel bars for the reinforcement of concrete including inspection and testing requirements - <http://www.ukcares.com/approved-companies> - Certificate number of conformance to BS4449 at the time of LCA study – 011001

CARES SRC Steel for the Reinforcement of Concrete Scheme. Appendix 1-N - Quality and operations assessment schedule for carbon steel bars for the reinforcement of concrete for use in nuclear applications and other mega projects including inspection and testing requirements - <http://www.ukcares.com/approved-companies> - Certificate number of conformance to BS4449 at the time of LCA study – 170601

CARES SRC Steel for the Reinforcement of Concrete Scheme. Appendix CP&AS 21 Quality and operations assessment schedule for Singapore Standard (SS 560:2016) weldable reinforcing steel bars, coils and decoiled products for the reinforcement of concrete including inspection and testing requirements- <http://www.ukcares.com/approved-companies> - Certificate number of conformance to SS 560:2016 at the time of LCA study – 180601

BS 4449:2005+A3:2016 Steel for the reinforcement of concrete. Weldable reinforcing steel. Bar, coil and decoiled product. Specification.

ASTM A615/A615M – 18 Standard Specification for Deformed and Plain Carbon-Steel Bars for Concrete Reinforcement.

ASTM A706/A706M – 16 - Standard Specification for Deformed and Plain Low-Alloy Steel Bars for Concrete Reinforcement.

EN 10080:2005 Steel for the reinforcement of concrete. Weldable reinforcing steel. General

ISO 6935-2:2007 - Steel for the reinforcement of concrete - Part 1: Plain bars.

ISO 6935-2:2019 - Steel for the reinforcement of concrete - Part 2: Ribbed bars.

NF A35-080-1 Décembre 2013 - Aciers pour béton armé - Aciers soudables - Partie 1: barres et couronnes.

UNE 36068:2011 - Ribbed bars of weldable steel for the reinforcement of concrete.

NBN A 24-301&304:1986 - Steel for reinforcement.

TS 708:2016 - Steel for the reinforcement of concrete - Reinforcing steel.

BDS 4758:2008 - Steel for the reinforcement of concrete - Weldable reinforcing steel (B420)

BDS 9252:2007 - Steel for the reinforcement of concrete - Weldable reinforcing steel B500.

AS/NZS 4671:2001 - Steel reinforcing materials.

MS 146:2014 – Steel for the reinforcement of concrete – Weldable reinforcing steel – Bar, coil and decoiled product - Specification (Fourth revision).

NBR 7480:2007 - Steel for The Reinforcement of Concrete Structures – Specification.

SI 4466-3:2013 - Steel for the reinforcement of concrete: Ribbed Bars.

GOST R 52544:2006 - Weldable deformed reinforcing rolled products of A500C and B500C classes for reinforcement of concrete constructions. Specifications.

NCH 204-2006 – Steel - Hot Rolled Bars for Reinforced Concrete

NT 26-05:2004 - Production Details of Rebars For Tunisia

NA 8634:1997 - Steel for the Reinforcement of Concrete: Ribbed Bars

D.M:2008 - Steel for the Reinforcement of Concrete Bars of Grade (B450C)

SS 560:2016 - Specification for steel for the reinforcement of concrete – Weldable reinforcing steel – Bar, coil and decoiled product